



Float and Board Level Indicator

Model : FBI

Overview

As the liquid level rises, a large dia float moves up with the change in liquid level in the tank. The float is attached to a multi strand wire rope, which passed through 2 nos. friction less specially designed pulleys. The pulleys in turn are connected to a pointer, which moves on a graduated scale by the side of the tank.

FEATURES

- Simple Operation
- Clear Visibility
- Easy Installation, modular design.
- Rugged Construction
- Less corrosion power coated finish
- Easy movement nylon roller pointer
- Dust free housing for pulleys

SPECIFICATION

Material of All	: MS
Wetted Part	: SS 304, SS 316, SS 316L, PP
Max. Temperature	: Up to 100°C
Max. Pressure	: 2 Bar
Float Diameter	: 300mm
Scale	: Aluminum with painted




Selection Guide

FBI-5M-M1

CONSTRUCTION

Tank Height in Mtr.		MOC	
2M	2 Mtr	M1	MS with SS Wetted Part
3M	3 Mtr	P1	PP
5M	5 Mtr		
10M	10 Mtr		

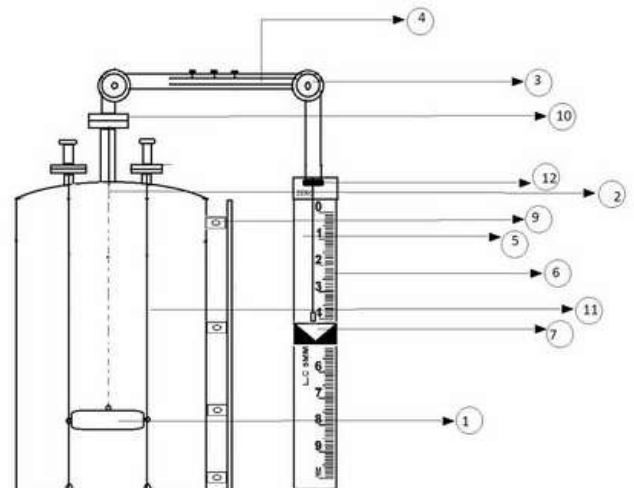

www.cpitpl.com



CPI TECHNOLOGY PVT. LTD

Phone: 7575808287/88/89 | Email: info@carepg.com